



SAV series - VSD Screw Air Compressor



SAV08 - 200 VSD energy-saving series



GREEN ENERGY LOVE THE EARTH


Highly Energy-Saving driven

- Simple structure for high reliability.
- Compact body design from coupling, motor bracket, motor to gearbox for 100% transmission efficiency
- The amount of lubricant for bearings, compression chamber and gears are carefully calculated to minimize the oil resistance during compression and maximize the efficiency.

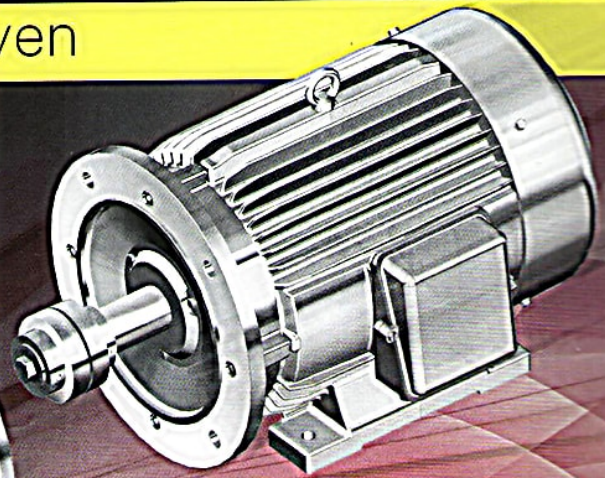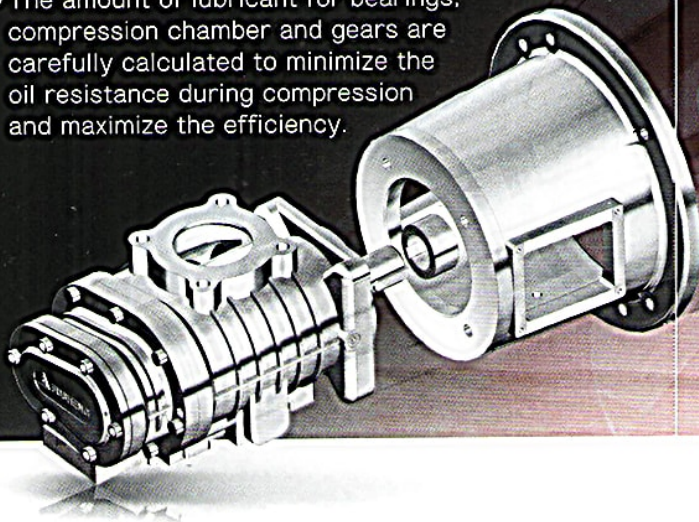


High Efficiency Airend Induce Air Flow from Axial and Radial directions

- High efficiency airend is designed by Fusheng Global R&D Center in Germany. The optimum design of rotor profile, volume and power consumption provides low rotational speed and increase the operating efficiency.
 - Lower operational noise level
 - Longer service life of airend and bearings.
 - Fully utilize effective rotor length to maximize the compression efficiency.

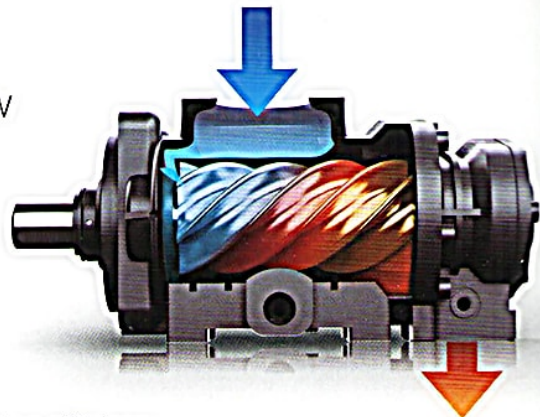

Highly Efficient Design




Inlet valve

One valve serves as non-return valve, shut-off valve and modulation control valve (optional) all together. The low pressure drop design optimizes air intake efficiency. The compressor adjusts itself automatically with the actual need for compressed air as it operates, allowing for more accurate control of unload pressure and thus greater energy efficiency.



All end faces are sealed to completely remove the leakage

An environment-protective zinc-connector is mounted for connection and the end faces are sealed to completely remove the leakage.

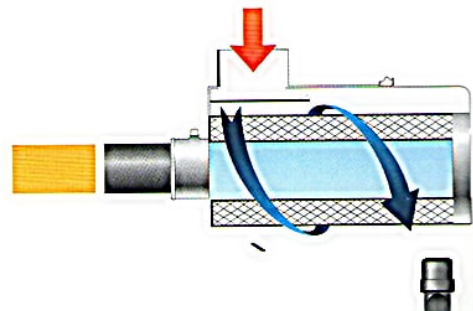


Safe and high-efficiency air filter system

- The big particle size of dust in the vacuumed air will follow the air whirl and fall into the rubber slot at front end of air filter casing instead of attaching to clog the surface of filtration core.
- The long service life filtration core is designed with large filtration area and smaller resistance against air suction to ensure that the pure air whirl is without impurities.


Unique cooling flow field, silence and efficiency

- In the electric control panel, the colder air is drawn in directly to ensure the best heat dissipation.
- Compressor inlet and cooler inlet are equipped with high-efficiency filters, effectively blocking the impurities into the compressor air end or attached to the cooler to ensure the cooling effect.
- With the centrifugal fan, cold air is sucked in directly from outside to cool the cooler, and hot air is dissipated out from the top; With the greater heat transfer surface, the cooler ensuring excellent cooling effect.
- The centrifugal fan located inside the unit series to suction port, discharges the hot air within the unit out from the top. This unique cooling air flow design, significantly reduces the noise generated due to the fan operation.
- During cooler cleaning, simply remove the cover without dismantle the air duct and doors.

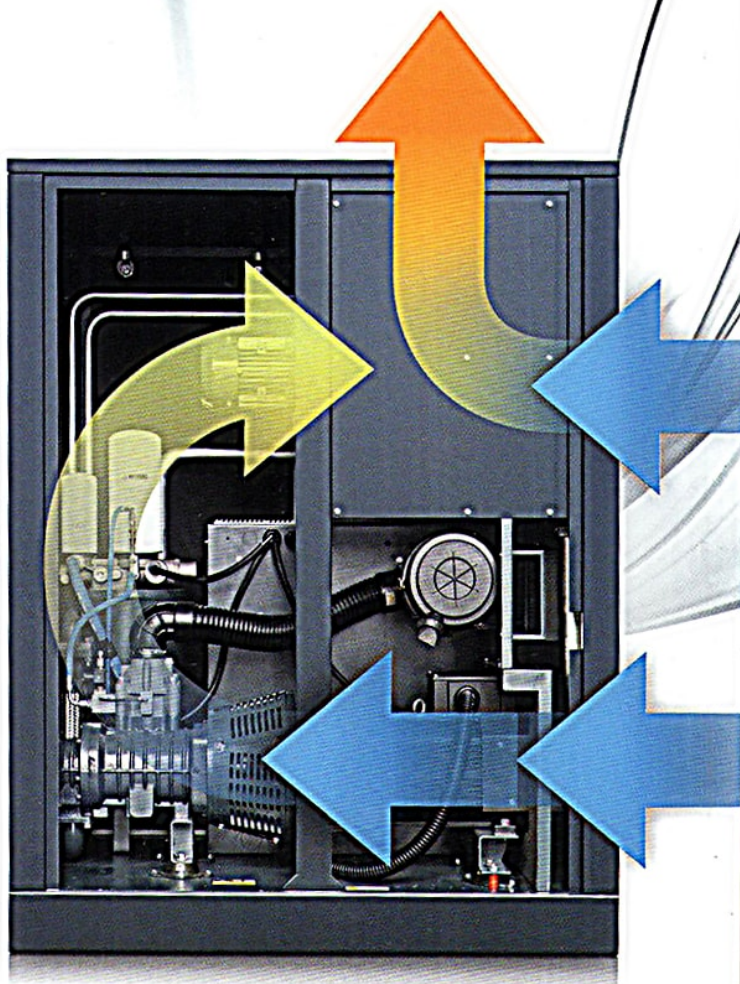

Eco- and user-friendly idea

Permanent-Magnet motor is an option for SA series screw compressor. It gives the compressor unit greater efficiency and better energy-saving.

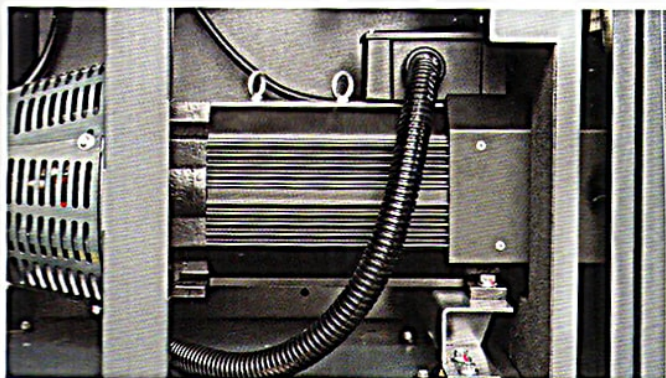

Small footprint but greater energy efficiency




From design concepts to application of parts, Fusheng's SA series features better performance and therefore higher energy efficiency level. The high performance compact design means smaller footprint and proximity to air use locations, thus reducing loss due to pipeline significantly.

IoT smart real-time service system (optional)

The IoT compressor management system in the cloud platform realizes the unification of monitoring, malfunction diagnosis and servicing in one package. The messages of compressor malfunction and real-time status are sent to the designated professionals by SMS and email.

GoService

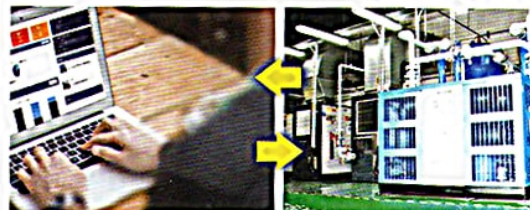


Vibration reducing device



The vibrations are reduced efficiently as the compressor is operating. It also prevents the propagation of low-frequency noises through resonance of solid objects while prolonging the compressor's service life.

SAVING ENERGY

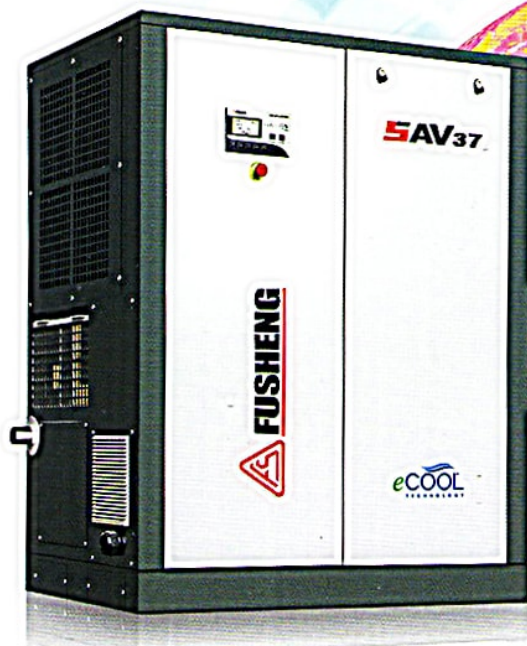

Energy Saving benefit of Variable-Speed air compressor


The variable-speed air compressor is able to save Operation cost up to 40% in its service life.

- Maintenance cost 5%
- Installation cost 10%
- Purchase cost 15%
- Energy cost 70%
- Energy saving cost 40%

Highly integrated and high-efficiency air end


VSD Starting / Running

- Starting current is reduced
- Starting current is eliminated for Y-Δ switching
- Extending service life of compressor

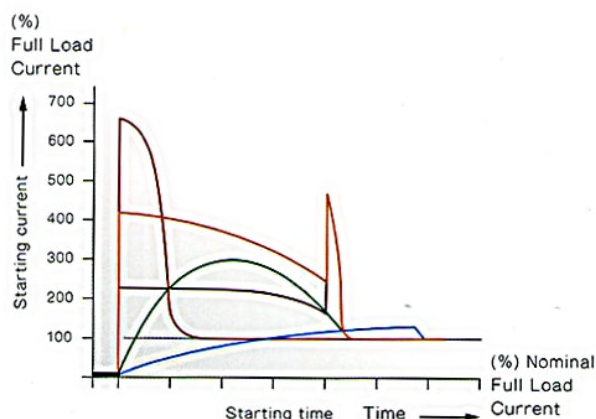


Frequency inverting control for energy saving

Variable-Speed air compressor can provide 30%~100% turndown range of capacity control. According to actual compressed-air demand of system to automatically adjust rotational speed of motor to meet the requirement. Providing optimum energy saving solution in variable loading management and reducing the operation cost up to 45%.

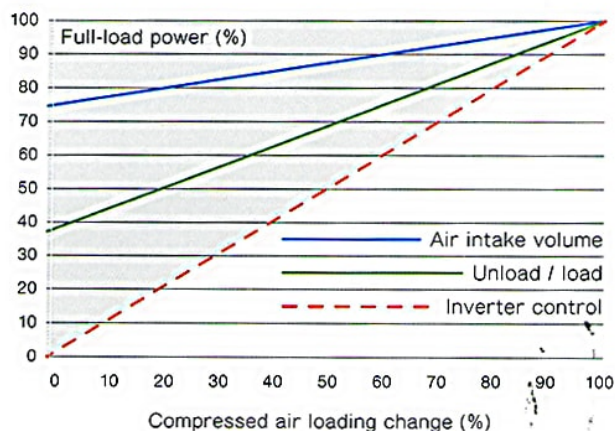

System flow chart

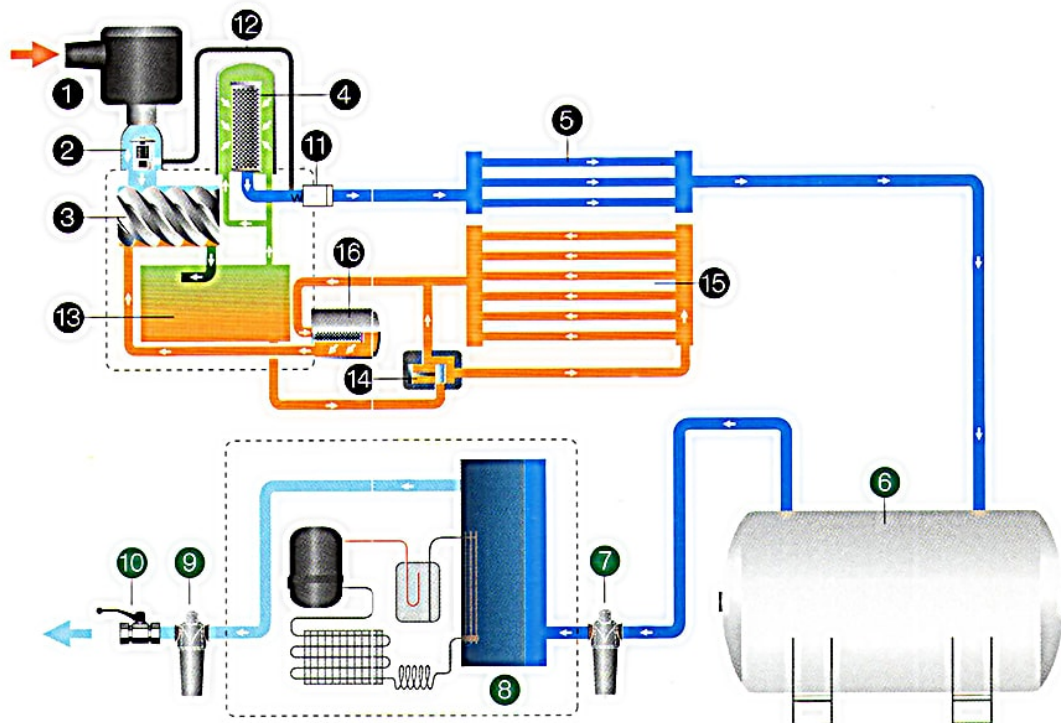

08-11

Air Flow

- | | | |
|-------------------------|---|---------------------------------|
| 1 Air filter | 6 Air receiver (Optional) | 11 Minimum pressure valve (MPV) |
| 2 Air inlet valve | 7 Precision filter (Optional) | 12 Air inlet control piping |
| 3 Air compressor a/rend | 8 Refrigeration dryer (Optional) | |
| 4 Oil fine separator | 9 Post precision filter (Available if required) | |
| 5 After cooler | 10 Compressed air outlet valve (Optional) | |

Oil Flow

- | |
|---------------------------|
| 13 Air/Oil separator tank |
| 14 Thermal control valve |
| 15 Oil cooler |
| 16 Oil filter |


15-37

Air Flow


- | |
|--------------------------------|
| 1 Air filter |
| 2 Air inlet valve |
| 3 Air compressor a/rend |
| 4 Minimum pressure valve (MPV) |
| 5 Air inlet control piping |
| 6 Oil fine separator |
| 7 After cooler |
| 8 Air outlet valve (Optional) |

Oil Flow

- | |
|--------------------------|
| 9 Air/Oil separator tank |
| 10 Thermal control valve |
| 11 Oil cooler |
| 12 Oil filter |

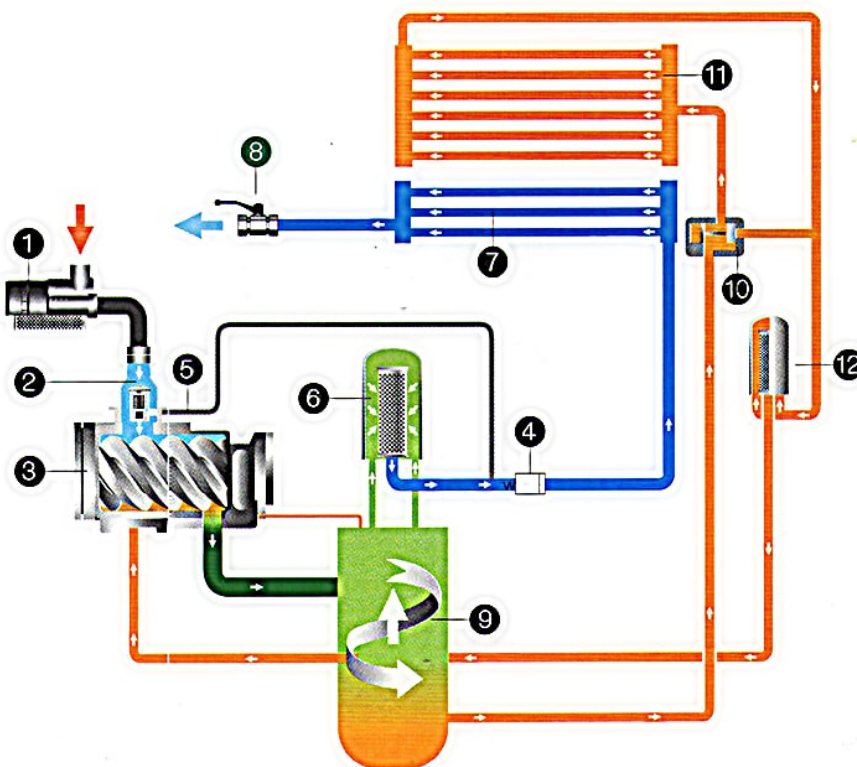

SAV series - VSD Air Compressor

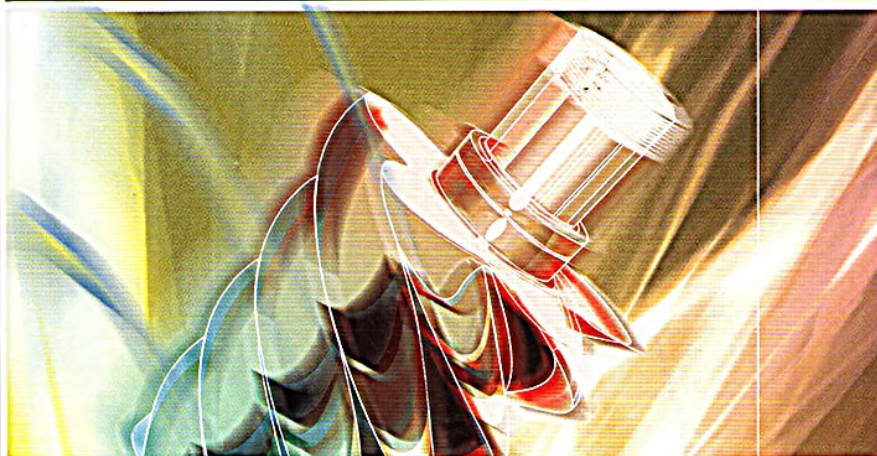

SAV08-37

Configuration specifications

● Standard ○ Optional ✕ Not available

Model	compressor	Dryer	Precision filter	Air receiver	inverter
SAV	●	✕	✕	✕	●
SAV-R	●	●	○	✕	●
SAV-T	●	✕	✕	●	●
SAV-F	●	●	○	●	●

Model	Working pressure	Delivery	Main motor power		Voltage	Lubricating oil volume	Compressed air outlet	Length	Width	Height	Weight	Noise								
	barG	m³/min	kW	HP	V	Liter	inch	mm	mm	mm	kg	dB(A)								
SAV08	7	0.64~1.27	7.5	10	220 380 415	7.5	G $\frac{3}{4}$	1200	670	1100	310	67								
SAV08-R	8	0.59~1.18									364									
SAV08-T	10	0.50~0.99									450									
SAV08-F	12	0.40~0.80									504									
SAV11	7	0.91~1.82	11	15							15		G1	1250	880	1515	320			
SAV11-R	8	0.85~1.7															374			
SAV11-T	10	0.76~1.52															460			
SAV11-F	12	0.68~1.35															514			
SAV15	7	0.75~2.5	15	20		220 380 415	15	G1	1250	880		1515					540	72		
		8																	0.69~2.3	
		10																	0.63~2.1	
		12																	0.54~1.8	
SAV22	7	1.17~3.9	22	30							220 380 415		15	G1	1250	880	1515	550	74	
		8																		1.11~3.7
		10																		0.96~3.2
		12																		0.84~2.8
SAV37	7	1.98~6.6	37	50	220 380 415		18.5	G1 $\frac{1}{2}$	1350	940		1680						755	75	
		8																		1.89~6.3
		10																		1.68~5.6
		12																		1.47~4.9

* Noise level is measured according to ISO 2151

SAV55-200

	Working pressure	Delivery	Main motor power		Voltage	Lubricating oil volume	Compressed air outlet	Length	Width	Height	Weight	Noise									
	barG	m³/min	kW	HP	V	Liter	inch	mm	mm	mm	kg	dB(A)									
SAV55A SAV55W	7	3.09~10.3	55	75	220 380 415	52	G2	2000	1250	1750	1660	76									
	8	3.03~9.7									1710										
	10	2.52~8.7																			
	12	2.28~7.8																			
SAV75A SAV75W	7	4.2~14	75	100		52	G2	2180	1330	1850	2010	76									
	8	3.84~12.8									1998										
	10	3.54~11.8																			
	12	3.18~10.6																			
SAV90A SAV90W	7	4.92~16.4	90	125		52	G2	2180	1330	1850	2150	76									
	8	4.59~15.3									2138										
	10	4.14~13.8																			
	12	3.72~12.4																			
SAV110A SAV110W	7	6.30~21.0	110	150		80	3" Flange	2940 2740	1710	1725	2900	78									
	8	6.00~20.0									2800										
	10	5.10~17.0																			
	12	4.59~15.3																			
SAV132A SAV132W	7	7.56~25.2	132	175							3600		3500								
	8	6.96~23.2																			
	10	6.3~21.0																			
	12	5.49~18.3																			
SAV160A SAV160W	7	8.76~29.2	160	215				120	4" Flange	3300 2900	1860		1945	3900	81						
	8	8.37~27.9												3800							
	10	7.38~24.6																			
	12	6.57~21.9																			
SAV185A SAV185W	7	9.78~32.6	185	250																3950	
	8	9.12~30.4																		3850	
	10	8.28~27.6																			
	12	7.59~25.3																			
SAV200A SAV200W	7	10.56~35.2	200	270									4000								
	8	10.11~33.7											3900								
	10	9.09~30.3																			
	12	8.31~27.7																			

* Noise level is measured according to ISO 2151

CÔNG TY TNHH TM DV ĐẠI LỢI - NHÀ PHÂN PHỐI CHUYÊN NGHIỆP

50/13/6 Nguyễn Quý Yêm, Phường An Lạc, Quận Bình Tân, Tp. Hồ Chí Minh

Tel: 08. 6674.4414 - 3876.5962 - Fax: 08.6260.5853

Email: dailoi@dailoi.com.vn - Website: dailoico.com.vn